


Glass Fiber Bifurcated Fiber BF23P

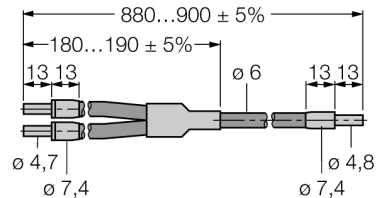

- Operating mode: Diffuse/Retroreflective
- PVC with galvanized spiral jacket
- Operating temperature of fiber-optic jacket: -40 °C ... +105 °C
- End sleeve for sensor: Stainless steel, smooth
- Operating temperature of fiber-optic tip: -140...+249 °C
- Optical fiber, bundle diameter: 3.2 mm
- Optical fiber, total length: ± 914 mm

Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. They transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode operation.

Type	BF23P
ID	3017233
Optical data	
Function	Diffuse mode sensor
Fiber-optic type	Glass
Mechanical data	
Design	Circular
Housing material	Plastic, PVC, Black
Jacket material	PVC over Stainless Steel Monocoil
Jacket material	plastic, PVC
Bundle diameter	3.2 mm
Material of the fiber-optic tip	Stainless Steel
Bending radius	Ø 25 mm
Ambient temperature	-40...+105 °C
Max. temperature tip	249 °C