


REI-E-111T8C-2B2500-C

Incremental Encoder

Efficiency Line

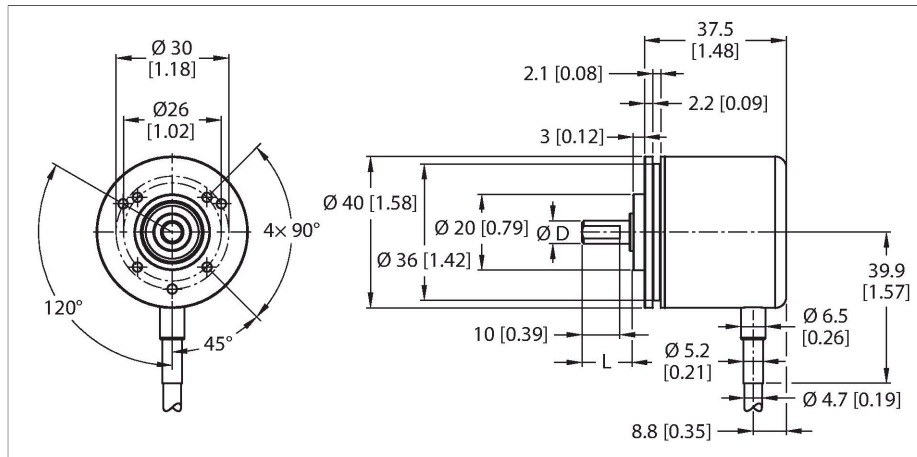

Features

- Synchro/clamping flange, Ø 40 mm
- Solid shaft, Ø 8 mm × 12.5 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4500 rpm
- 10...30 VDC
- Push-pull/HTL invertible
- Pulse frequency max. 300 kHz
- Cable connection
- 2500 pulses per revolution

Technical data

Type	REI-E-111T8C-2B2500-C
ID	100011960
Measuring principle	Optical
General data	
Max. Rotational Speed	4500 rpm
Moment of inertia of the rotor	$0.2 \times 10^{-5} \text{ kgm}^2$
Starting torque	< 0.05 Nm
Output type	Incremental
Resolution, incremental	2500 ppr
Electrical data	
Operating voltage	10...30 VDC
No-load current	100 mA
Output current	≤ 30 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Pulse frequency max.	300 kHz
Signal level high	min. $U_B - 1 \text{ V}$
Signal level low	max. 0.5 V
Output function	Push-Pull/HTL, invertable
Mechanical data	
Design	Solid shaft
Flange type	Synchro/clamping flange
Flange diameter	Ø 40 mm
Shaft Type	Solid shaft
Shaft diameter D [mm]	8

Wiring diagram

WH	GND
BN	U_B +
GN	A
YE	A inv.
GY	B
PK	B inv.
BU	0 -
RD	0 inv. -

Technical data

Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Aluminium
Electrical connection	Cable
	radial
cable length	2 m
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-20...+70 °C
Vibration resistance (EN 60068-2-6)	100 m/s², 55...2000 Hz
Shock resistance (EN 60068-2-27)	1000 m/s², 6 ms
Protection class	IP64
Protection class shaft	IP64

Accessories

RCS-19-08-08	1545359
--------------	---------

Bellows coupling, outer diameter:
19 mm, bore diameter: 8 mm/8 mm

