



Technical data

	5-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s²), 4 ms
Protection class	IP65
Protection class shaft	IP65

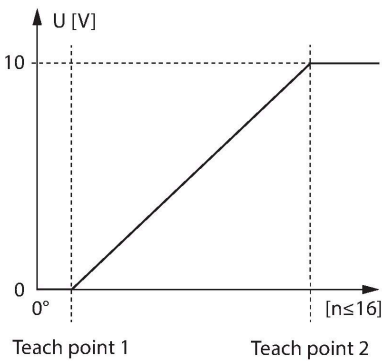


Accessories


RCS-19-06-06	1545360
Bellows coupling, outer diameter: 19 mm, bore diameter: 6 mm/6 mm	




RCS-15-08-06	1545361
Bellows coupling, outer diameter: 15 mm, bore diameter: 8 mm/6 mm	




RCS-15-06-06	1545362
Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/6 mm	



RCS-15-06-04	1545363
Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/4 mm	



RCS-19-10-06	1545358
Bellows coupling, outer diameter: 19 mm, bore diameter: 10 mm/6 mm	



Accessories

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

