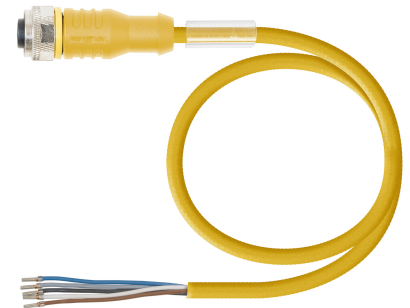
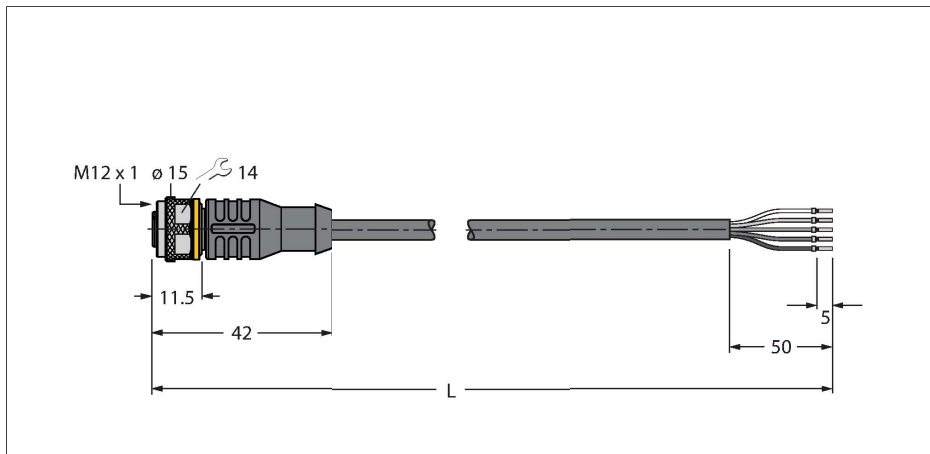


# RKC4.5T-2/TXY3713

## Actuator and Sensor Cable, PUR – Connection Cable



### Technical data


|                                 |                                                                       |
|---------------------------------|-----------------------------------------------------------------------|
| Type                            | RKC4.5T-2/TXY3713                                                     |
| ID                              | 6635732                                                               |
| Remark to product               | Specification according to VASS requirements (version: February 2021) |
| Connector A                     | Female, M12 × 1, Straight, A-coded                                    |
| Number of Pins                  | 5                                                                     |
| Contacts                        | Brass, CuZn, Gold-plated                                              |
| Contact carriers                | Plastic, TPU, Black                                                   |
| Connector body                  | Plastic, TPU, Yellow                                                  |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated                                            |
| Seal                            | Plastic, FPM/FKM                                                      |
| Mechanical lifespan             | > 100 Mating cycles                                                   |
| Pollution degree                | 3                                                                     |
| Protection class                | IP67, IP69K, Only in screwed condition                                |
| Cable                           |                                                                       |
| Cable diameter                  | Ø 6 mm ±0.20                                                          |
| Cable length                    | 2 m                                                                   |
| Cable jacket                    | PUR, Yellow                                                           |
| Core insulation                 | PP                                                                    |
| Core cross-section              | 5 x 0.34 mm²                                                          |
| Arrangement of strands          | 42 x 0.1 mm                                                           |
| Core colors                     | BN, WH, BU, BK, GY                                                    |
| Electrical properties at +20 °C |                                                                       |
| Rated voltage                   | 60 V                                                                  |
| Test voltage                    | 2000 V                                                                |
| Current                         | 4 A                                                                   |
| Insulation resistance           | > 30.5 MΩ/km                                                          |
| forward resistance              | max. 57 Ω/km                                                          |

### Features




- Female M12, straight, 5-pin
- Jacket material: PUR
- Jacket color: yellow
- Grip color: yellow
- Resistant to welding sparks
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (acc. to FT2 (UL/CSA); IEC 60332-1-2; IEC 60332-2-2)
- Halogen free (acc. to EN 50267)
- Free from silicone, PVC and LABS (acc. to PV3.10.7)
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 2.0 m

### Contact assignment








### Circuit Diagram




Technical data

| Mechanical and chemical properties              |                 |
|-------------------------------------------------|-----------------|
| Bending radius (stationary installation)        | ≥ 5 x Ø         |
| Bending radius (flexible use)                   | ≥ 10 x Ø        |
| Bending cycles                                  | ≥ 5 million     |
| Admissible acceleration                         | max. 5 m/s²     |
| Admissible travel path, horizontal              | 5 m (at 5 m/s²) |
| Admissible travel path, vertical                | 2 m (at 5 m/s²) |
| Admissible traversing speed                     | 3.3 m/s         |
| Torsional stress                                | ± 180 °/m       |
| Ambient temperature range (stationary)          | -50...+80 °C    |
| Ambient temperature range (In motion)           | -25...+80 °C    |
| Ambient temperature during drag chain operation | -25...+60 °C    |
| Approvals                                       | cULus           |

Accessories

|                                                                                     |  |           |                                                                                                                                                                                                                   |                                                                                      |           |                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|--|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TORQUE-WRENCH-SET-AS                                                                |  | 6936170   | Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)                                                                                             | BS8151-0                                                                             | 6904611   | Field-wireable male connector, M12 × 1, straight, 5-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw |
|                                                                                     |  |           |                                                                                                                                                                                                                   |  |           |                                                                                                                                                                                                                    |
| BS8251-0                                                                            |  | 6904612   | Field-wireable male connector, M12 × 1, angled, 5-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw  | FW-ERSPM0526-SA-P-0408                                                               | 100002535 | Field-wireable male connector, M12 × 1, straight, 5-pin, push-in connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw        |
|  |  |           |                                                                                                                                                                                                                   |  |           |                                                                                                                                                                                                                    |
| FW-ERSPM0516-SA-S-0408                                                              |  | 100002289 | Field-wireable male connector, M12 × 1, straight, 5-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm², plastic housing, metal retaining screw | FW-EWSPM0516-SA-S-0408                                                               | 100002291 | Field-wireable male connector, M12 × 1, angled, 5-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm², plastic housing, metal retaining screw    |
|  |  |           |                                                                                                                                                                                                                   |  |           |                                                                                                                                                                                                                    |

Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |