


Q4XFILAF310-Q8

Photoelectric Sensor – Laser Distance Sensor (Triangulation)

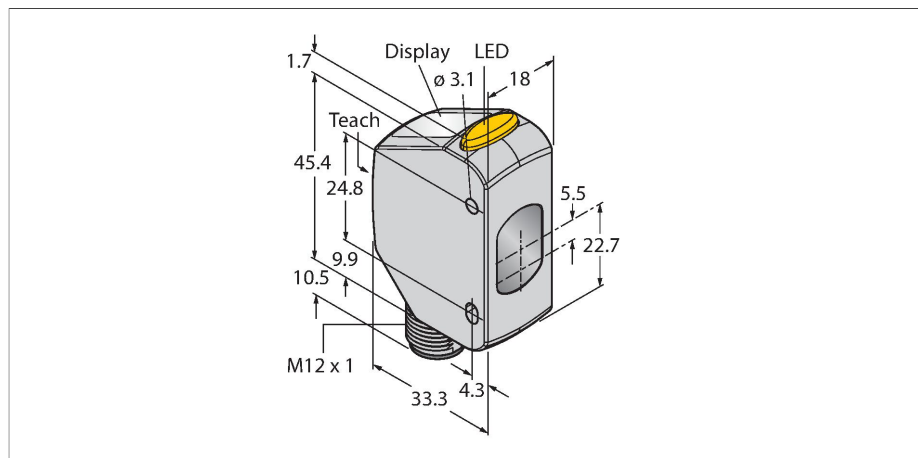

Technical data


Type	Q4XFILAF310-Q8
ID no.	3097543
Optical data	
Function	Proximity switch
Operating mode	Background/foreground suppression
Light type	Red
Wavelength	655 nm
Laser class	▲ 1
Optical resolution	1 mm
Repeatability	0.5 mm
Range	35...310 mm
Ambient light immunity	5000 lux
Electrical data	
Operating voltage	10...30 VDC
DC rated operational current	≤ 28 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	Analog output
Type of analog output	4...20 mA
Current output	4...20 mA
Load resistance	≤ 1000 Ω
Readiness delay	≤ 750 ms
Response time typical	< 0.5 ms
Mechanical data	
Design	Rectangular, Q4X
Dimensions	33.5 x 18 x 57.5 mm
Housing material	Metal, Stainless steel



Features

- 4-digit 7-segment LED display
- 3 buttons
- Output indicator (yellow)
- IP67/69K
- ECOLAB-certified
- Range: 35...310 mm
- Laser class 1, red, 655 nm, acc. to IEC 60825-1:2007
- Operating voltage: 12...30 VDC
- Analog output: 4 ... 20 mA
- Rectangular design
- Stainless steel housing (1.4404)

Wiring diagram

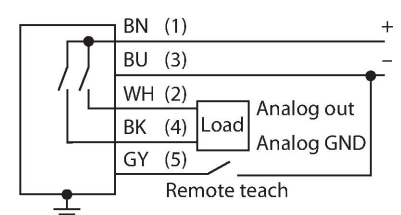

Functional principle

The Q4X is a laser-distance sensor working on the principle of laser triangulation. It has a range of 35...310 mm, a resolution of up to 0.3 mm and an analog laser class 1 current output (4...20 mA).

With the dual mode functionality, the Q4X captures not only distances but also the light intensity that is reflected by an object. This unique feature allows lasers to be used for applications that would have been inconceivable before this.


In RUN mode, you can change the switchpoint, adjust light and dark-switching and teach the sensor accordingly. In SETUP mode, you can select teach, all standard

Technical data

Lens	acrylic, PMMA
Electrical connection	Connectors, M12 × 1, PVC
Number of cores	5
Ambient temperature	-10...+50 °C
Storage temperature	-25...+75 °C
Relative humidity	35...95 %
Protection class	IP67 IP68 IP69
Special features	Chemical-resistant Wash down Resistant to chemicals
Switching state	LED, Yellow
Display	4-digit 7-segment LED display
Tests/approvals	
Vibration resistance	MIL-STD-202G, Method 201A (10 to 60 Hz, 1.52 mm peak to peak amplitude, for 2 hours along the x, y and z-axis), sensor operating
Shock test	MIL-STD-202G, Method 213B Condition I (100G 6x along the XYZ-axis, 18 impacts), sensor in operation
Approvals	CE, cULus, ECOLAB

operating parameters and also return to the factory defaults.

Excess Gain Curve

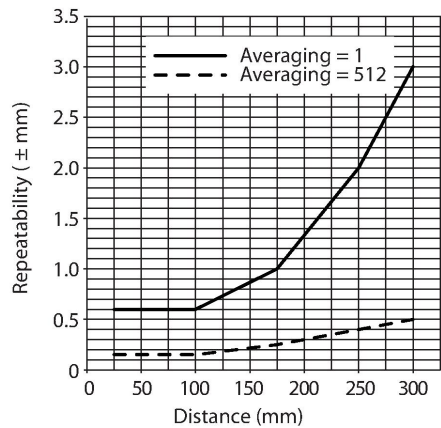

Accessories


SMBQ4XFAM10

3091513


Technical drawing of the SMBQ4XFAM10 mounting bracket. The drawing shows a side view of the bracket with various dimensions labeled. The main body is M10 x 1.5 x 50. The bracket has a rotatable joint with a 37mm diameter. The mounting hole is 17mm in diameter. The bracket is made of stainless steel. The drawing also shows the M3 x 0.5 (7x) mounting holes and the 41.3mm distance between them. The bracket is 43.5mm high and 33mm wide. The mounting hole is 24.2mm in diameter. The bracket is 5.1mm thick. The mounting hole is 9.7mm in diameter. The bracket is 12mm in diameter. The mounting hole is 13.4mm in diameter.

Mounting bracket, rotatable, stainless steel, for sensors of the Q4X/Q3X series, M10 x 1.5 thread

Accessories

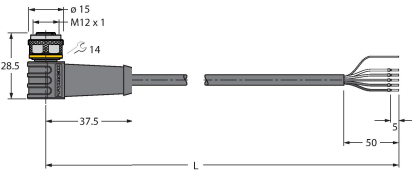Dimension drawing	Type	ID no.	
	RKC4.5T-2/TEL	6625016	Connection cable, female M12, straight, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	RKH4.5-2/TFG	6933455	Connection cable, M12 female, straight, 5-pin, stainless steel coupling nut, cable length: 2 m, jacket material: TPE, gray, temperature range -40...+105 °C; other cable lengths and designs available, see www.turck.com
	RKS4.5T-2/TEL	6626361	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, sheath material: PVC, black; shielded; cULus approval; other cable lengths and qualities available, see www.turck.com
	WKS4.5T-2/TEL	6626364	Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, sheath material: PVC, black; shielded; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

Dimension drawing	Type	ID no.	
	BRT-Q4X-60X18	3095776	Reflector for Q4X laser sensors for clear object detection or dual-mode applications, rectangular housing: 60 mm x 18 mm

Dimension drawing	Type	ID no.	
	BRT-Q4X-60X50	3095777	Reflector for Q4X laser sensors, for clear object detection or dual-mode applications, rectangular housing: 60 mm x 50 mm

