


LEDUV395A70XD5-PM



Vision System – Area Light

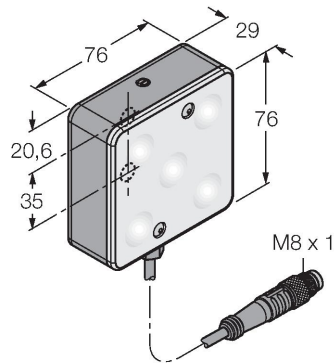

Features

- High-Intensity
- Protection class: IP50
- Color: ultraviolet
- Light intensity, adjustable
- Power supply: 24 VDC
- Pigtail M8x1, 0.3m

Wiring diagram



Functional principle

Area lights are perfectly suited for uniform illumination of a determined area.

Technical data

Type	LEDUV395A70XD5-PM
ID	3019894
Signal and display data	
Purpose	Image processing
Function	Area light
Light type	UV
Wavelength	395 nm
LED service life (L70)	50000 h
Dimmable	Yes
Features of color 1	UV
Electrical data	
Operating voltage	24 VDC
DC rated operational current	≤ 350 mA
Max. current consumption per color	500 mA
Mechanical data	
Design	Rectangular
Dimensions	76.2 x 76.2 x 29.2 mm
Housing material	Metal, Low-carbon steel
Window material	Plastic, diffuse
Electrical connection	Cable with connector, M8 x 1, 0.3 m, PVC
Number of cores	3
Ambient temperature	0...+50 °C
Protection class	IP50
Tests/approvals	
Approvals	CE, cULus listed

