


FW-M12ST5D-G-SB-ME-SH-8

Field-Wireable Connector

Male Connector M12 × 1, Straight

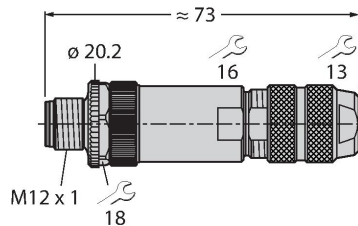

Technical data

Type	FW-M12ST5D-G-SB-ME-SH-8
ID	6604218
Connector A	Male, M12 × 1, Straight, D-coded
Number of Pins	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA, Black
Connector body	Die-cast Zinc, GD-Zn, nickel-plated, Black
Coupling nut/screw	Die-cast Zinc, GD-Zn, Nickel-plated
Seal	Plastic
External diameter of the cable	5...8 mm
Core cross-section/Clamping ability	0.14...0.75 mm ²
Connection mode	Screw/clamp connection
Mechanical lifespan	> 100 Mating cycles
Protection class	IP67, (screwed together)
Network protocol	Ethernet
Shielding	yes
Electrical properties at +20 °C	
Rated voltage	250 V
Current	4 A
Insulation resistance	≥ 10 ⁸ Ω
forward resistance	≤ 3 mΩ
Mechanical and chemical properties	
Ambient temperature range (stationary)	-40...+85 °C
Approvals	UL

Features



- For use in Ethernet applications
- Shielding via iris spring connection
- D-coding
- Metal housing
- Screw-clamp terminal
- 4-pin
- Cable feedthrough 5.0...8.0 mm
- Approval: UL

Contact assignment

