


T18AP6DLQ


Photoelectric Sensor – Diffuse Mode Sensor

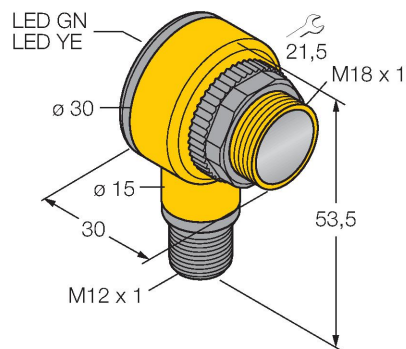

Features

- M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Selectable light/dark operation or light operation with alarm function
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram

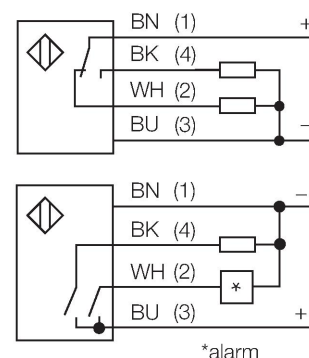


Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

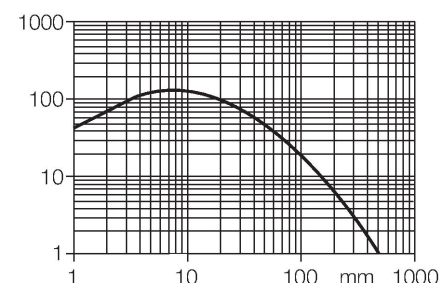

Technical data


Type	T18AP6DLQ
ID no.	3044385
Optical data	
Function	Diffuse mode sensor
Light type	IR
Wavelength	880 nm
Range	0...500 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Connection programmable, PNP
Switching frequency	≤ 160 Hz
Overcurrent release	> 220 mA
Mechanical data	
Design	Rectangular with thread, T18
Dimensions	30 x 30 x 54 mm
Housing material	Plastic, PBT
Lens	plastic, Acrylic
Electrical connection	Connectors, M12 × 1
Ambient temperature	-40...+70 °C
Protection class	IP67 IP69K
Special features	Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow

Technical data

Error indication	LED, green, Flashing
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL, CSA


Accessories

SMB1815SF 3053279



Mounting bracket, PBT black, for PICO-GUARD points

SMB18A 3033200




Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18FM 3079421

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

SMBAMS18P 3073134



Mounting bracket, stainless steel, for sensors with 18 mm thread


Accessories

Dimension drawing Type ID no.

RKC4.4T-2/TEL

6625013

Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

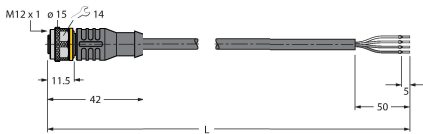

WKC4.4T-2/TEL

6625025

Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

