


REM-104HA3E-5C13S12M-H1181

Absolute Rotary Encoder - Multiturn

Industrial Line

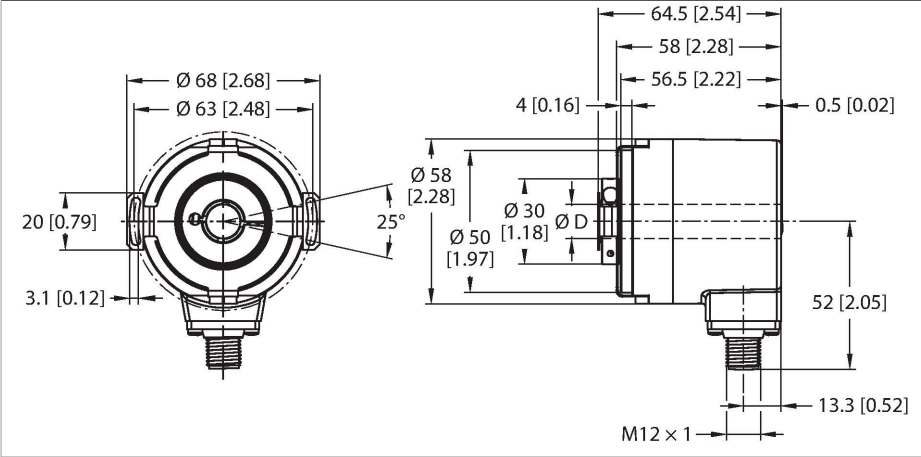



Technical data

Type	REM-104HA3E-5C13S12M-H1181
ID	100011405
Measuring principle	Optical
General data	
Max. Rotational Speed	4000 rpm
Moment of inertia of the rotor	$6 \times 10^{-6} \text{ kgm}^2$
Starting torque	$< 0.05 \text{ Nm}$
Absolute accuracy	$\pm 0.015^\circ$ At 25°C
Output type	Absolute multiturn
Resolution singleturn	13 Bit
Resolution multiturn	12 Bit
Electrical data	
Operating voltage	10...30 VDC
No-load current	30 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Communication protocol	SSi
Output function	Binary coded
Mechanical data	
Design	Hollow shaft
Flange type	Flange with stator coupling
Flange diameter	$\varnothing 63 \text{ mm}$
Shaft Type	Hollow shaft
Shaft diameter D [mm]	12.7
Shaft material	Stainless steel

Features

- Flange with stator coupling, $\varnothing 63 \text{ mm}$
- Hollow shaft, $\varnothing 12.7 \text{ mm}$
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- $-40 \dots +85^\circ\text{C}$
- Max. 4000 rpm (continuous operation 2000 rpm)
- 10...30 VDC
- SSI, binary
- M12 $\times$ 1 male, 8-pin
- Singleturn, 13-bit resolution
- Multiturn, 12-bit resolution


Wiring diagram

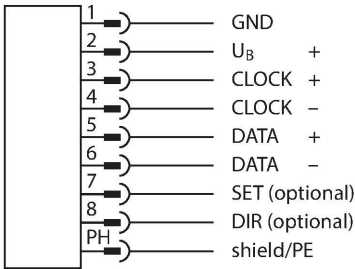

Technical data

Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	M12, 8-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	100 m/s², 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s², 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories

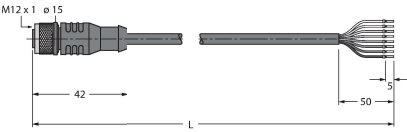Dimension drawing	Type	ID	
	E-RKC 8T-264-2	U-04781	Connection cable, female M12, straight, 8-pin (twisted pairs), shielded, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com