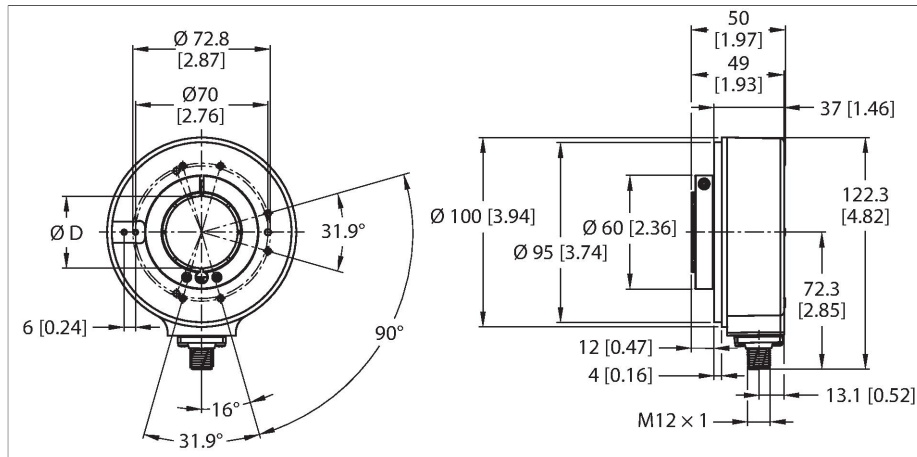


REI-43H40S-2B1024-H1181

Incremental Encoder

Industrial Line





Features

- Flange without mounting element, Ø 100 mm
- Hollow shaft, Ø 40 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP65 on housing and shaft side
- -40 ... +80 °C
- Max. 6000 rpm (at 60 °C: 2500 rpm)
- 10...30 VDC
- Push-pull/HTL invertible
- Pulse frequency max. 300 kHz
- M12 × 1 male connector, 8-pin
- 1024 pulses per revolution

Technical data

Type	REI-43H40S-2B1024-H1181
ID	100011460
Measuring principle	Optical
General data	
Max. Rotational Speed	6000 rpm
Moment of inertia of the rotor	$220 \times 10^{-6} \text{ kgm}^2$
Starting torque	< 0.2 Nm
Output type	Incremental
Resolution, incremental	1024 ppr
Electrical data	
Operating voltage	10...30 VDC
No-load current	100 mA
Output current	≤ 30 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Pulse frequency max.	300 kHz
Signal level high	min. $U_B - 3 \text{ V}$
Signal level low	max. 2.5 V
Output function	Push-Pull/HTL, invertable
Mechanical data	
Design	Hollow shaft
Flange type	Flange without mounting element
Flange diameter	Ø 100 mm
Shaft Type	Hollow shaft
Shaft diameter D [mm]	40







Wiring diagram



Technical data


Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	8-pin
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	10 g (100 m/s²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	200 g (2000 m/s²), 6 ms
Protection class	IP65
Protection class shaft	IP65

Accessories

RME-5	1544616	 Technical drawing of the RME-5 mounting panel. It shows a circular panel with a central hole and eight mounting holes. Dimensions include a central hole diameter of 70 mm, an outer diameter of 79.8 mm, and a mounting hole diameter of 9.5 mm. A 3/8 16 UNC x 1" screw is shown for mounting.	Stainless steel mounting panel for hollow shaft encoders, reference diameter 149 mm, for applications with axial play
RME-6	1544617	 Technical drawing of the RME-6 mounting panel. It shows a circular panel with a central hole and eight mounting holes. Dimensions include a central hole diameter of 70 mm, an outer diameter of 79.8 mm, and a mounting hole diameter of 9.5 mm. A 3/8 16 UNC x 1" screw is shown for mounting.	Stainless steel mounting panel for hollow shaft encoders, reference diameter 104...206 mm, for applications with fixing points on adjustable reference diameter
RME-10	1544621	 Technical drawing of the RME-10 mounting element. It shows a rectangular element with a central hole and two mounting holes. Dimensions include a central hole diameter of 110 mm, a mounting hole diameter of 2.5 mm, and a total width of 30 mm.	Stainless steel mounting element for hollow shaft encoders, pitch diameter 110 mm, for applications with high axial play
RME-11	1544622	 Technical drawing of the RME-11 mounting element. It shows a rectangular element with a central hole and two mounting holes. Dimensions include a central hole diameter of 110 mm, a mounting hole diameter of 2.5 mm, and a total width of 12 mm.	Stainless steel mounting element for hollow shaft encoders, pitch diameter 76 mm, for applications with limited mounting space
RME-15	1544626	 Technical drawing of the RME-15 metal arm bracket. It shows a bracket with a central hole and two mounting holes. Dimensions include a central hole diameter of 18 mm, a mounting hole diameter of 5 mm, and a total length of 70 mm.	Metal arm bracket, for hollow shaft encoders, length 70 mm; for applications with little axial and radial play; flexibly adjustable
RME-16	1544627	 Technical drawing of the RME-16 metal arm bracket. It shows a bracket with a central hole and two mounting holes. Dimensions include a central hole diameter of 18 mm, a mounting hole diameter of 5 mm, and a total length of 100 mm.	Metal arm bracket, for hollow shaft encoders, length 100 mm; for applications with little axial and radial play; flexibly adjustable


RME-171544628

Metal arm bracket, for hollow shaft encoders, length 150 mm; for applications with little axial and radial play; flexibly adjustable



RME-181544629

Stainless steel stator coupling for hollow shaft encoders, reference diameter 119 mm, for highly dynamic applications with axial and radial play



Accessories

Dimension drawing	Type	ID	
	RKC8T-2/TXL	6625142	Connection cable, M12 female connector, straight, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval
	WKC8T-2/TXL	6625145	Connection cable, M12 female connector, angled, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval