


# T18AW3DQP1

## Photoelectric Sensor – Diffuse Mode Sensor

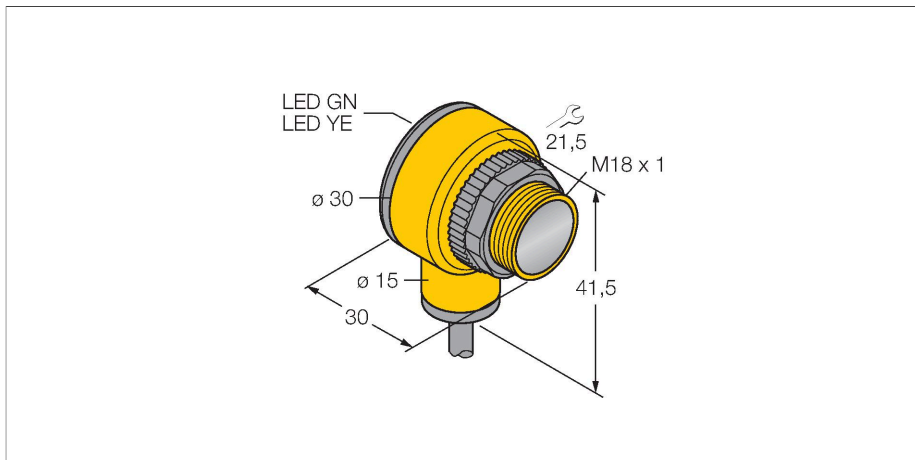


### Technical data

Type	T18AW3DQP1
ID no.	3078523
<b>Optical data</b>	
Function	Proximity switch
Operating mode	Diffuse
Light type	IR
Wavelength	880 nm
Range	0...300 mm
<b>Electrical data</b>	
Operating voltage	20...250 VAC
AC rated operational current	≤ 200 mA
Output function	Light operation, Relay output
Switching frequency	≤ 40 Hz
Readiness delay	≤ 100 ms
Response time typical	< 16 ms
Setting option	Potentiometer
<b>Mechanical data</b>	
Design	Rectangular with thread, T18
Dimensions	Ø 18 x 30 x 30 x 41.5 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable with connector, 1/2", 0.15 m, PVC
Number of cores	4
Core cross-section	0.5 mm <sup>2</sup>
Ambient temperature	-40...+70 °C
Protection class	IP67 IP69

### Features

- M12 × 1 cable with male end, 150 mm, 4-pin
- Protection class IP67
- Ambient temperature: -40 °C...+70 °C
- Selectable light/dark operation or light operation with alarm function

### Wiring diagram




### Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

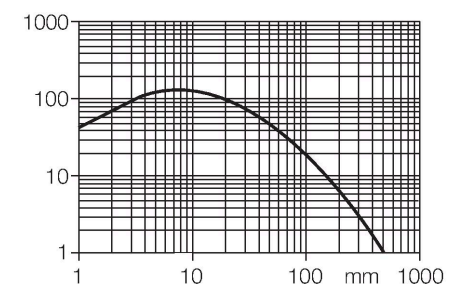


## Technical data

Special features	Chemical-resistant Encapsulated Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Excess gain indication	LED
<b>Tests/approvals</b>	
Approvals	CE, UL, CSA


## Accessories

SMB1815SF 3053279

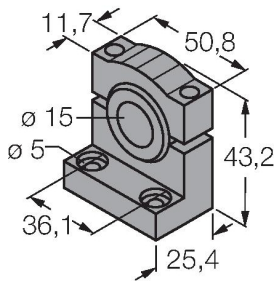

Mounting bracket, PBT black, for PICO-GUARD points

SMB18A 3033200

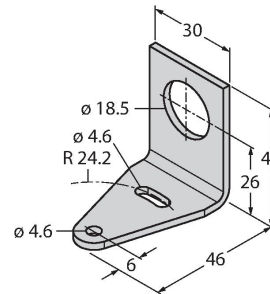


Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18FM 3079421

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

SMBAMS18P 3073134

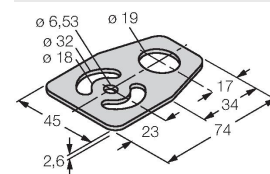

Mounting bracket, stainless steel, for sensors with 18 mm thread