

LED APL-RGBW 1400 PMMA_d-M12-57

Art. Nr. 1-000000-06931

Ktl. Nr. 15070915

EAN Nr. 4260654160192

Normen / Norms

DIN EN IEC 60598-1 DIN EN 12464-1

DIN EN IEC 55015

DIN EN 61547

DIN EN 62471




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W/R/G/B)	86,2W / 40,2W / 39,4W / 38,4W
Dimmbar / Dimmable	extern PWM
Anschluss / Connection Type	Flansch, M12, 5-Pol, A-Codiert
Kaskadierbar / Cascadable	Nein
Polbild	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5000 K
Lichtstrom / Luminous Flux (W/R/G/B)	5068lm / 656lm / 1919lm / 379lm
Effizienz / Efficiency	39 lm/W
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	RA / CRI 80
Photobiological Safety	RG-1

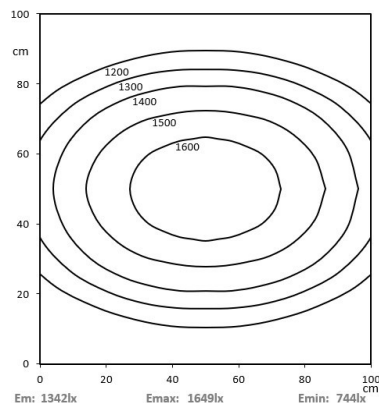

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diffus
Befestigung / Fastening	Starr
Gewicht(Netto) / Weight(Net)	3,43 kg
Betriebstemperatur / Operating Temp.	-20°C / +45°C
Lebensdauer / Lifetime	min. 60000 h
Zubehör / Equipment	-

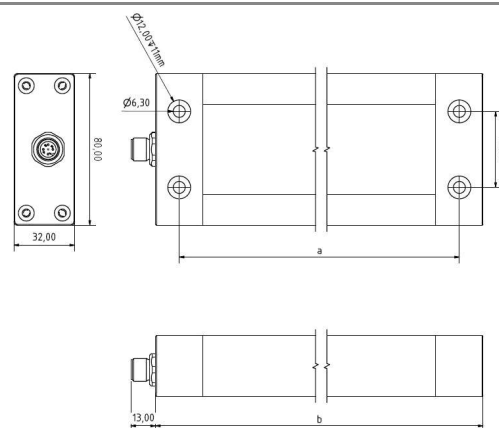

a = 1445mm b = 1470mm

*Technische Änderungen vorbehalten | technical modifications reserved