


# LED SL-RGBW 840 S-PMMA d-M8d-57

Art. Nr. 1-000000-07041

Ktl. Nr. 15070921

EAN Nr. 4260654163865

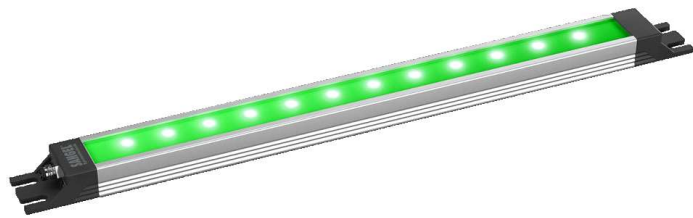


## Normen / Norms

DIN EN IEC 60598-1

DIN EN IEC 55015

DIN EN 61547

DIN EN 62471

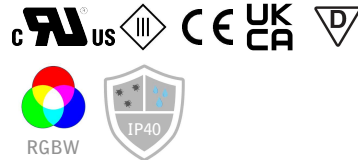


## Elektrische Rahmenbedingungen / Electrical characteristic

|                             |                               |
|-----------------------------|-------------------------------|
| Netzanschluss / Main Supply | 24 VDC                        |
| Leistung / Power (W/R/G/B)  | 25,9W / 12,1W / 11,8W / 11,5W |
| Dimmbar / Dimmable          | extern PWM                    |
| Anschluss / Connection Type | Flansch, M8, 5-Pol, B-Codiert |
| Kaskadierbar / Cascadable   | Ja                            |
| Polbild                     |                               |


## Licht / Light

|                                      |                                |
|--------------------------------------|--------------------------------|
| Bestückt / Fitted With               | LED                            |
| Lichtfarbe / Light Colour            | 5000 K                         |
| Lichtstrom / Luminous Flux (W/R/G/B) | 1836lm / 261lm / 658lm / 144lm |
| Effizienz / Efficiency               | 47 lm/W                        |
| Abstrahlwinkel / Beam Angle          | 100°                           |
| Farbtreue / Colour Rendering         | RA / CRI 80                    |
| Photobiological Safety               | RG-1                           |

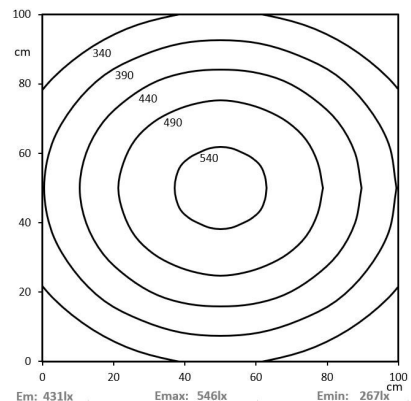

## Mechanik / Mechanics

|                                      |               |
|--------------------------------------|---------------|
| Gehäuse / Housing                    | Aluminium     |
| Abdeckung / Cover                    | PMMA, Diffus  |
| Befestigung / Fastening              | Starr         |
| Gewicht(Netto) / Weight(Net)         | 0,63 kg       |
| Betriebstemperatur / Operating Temp. | -20°C / +45°C |
| Lebensdauer / Lifetime               | min. 60000 h  |
| Zubehör / Equipment                  | -             |

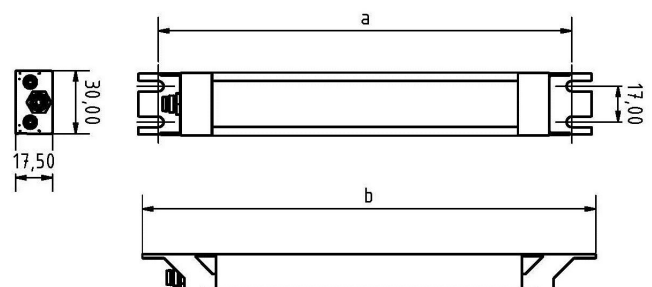

a= 903mm b= 915mm

\*Technische Änderungen vorbehalten | technical modifications reserved