


LED SL-RGBW 1400 S-PMMA-Ad-M8-57

Art. Nr. 1-000000-07059

Ktl. Nr. 15071026

EAN Nr. 4260654164046

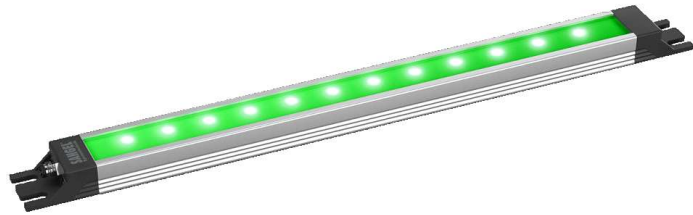


Normen / Norms

DIN EN IEC 60598-1

DIN EN IEC 55015

DIN EN 61547

DIN EN 62471

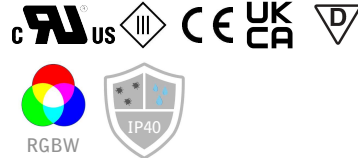


Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W/R/G/B)	43,1W / 20,1W / 19,7W / 19,2W
Dimmbar / Dimmable	extern PWM
Anschluss / Connection Type	Flansch, M8, 5-Pol, B-Codiert
Kaskadierbar / Cascadable	Nein
Polbild	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5000 K
Lichtstrom / Luminous Flux (W/R/G/B)	3060lm / 434lm / 1096lm / 240lm
Effizienz / Efficiency	47 lm/W
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	RA / CRI 80
Photobiological Safety	RG-1

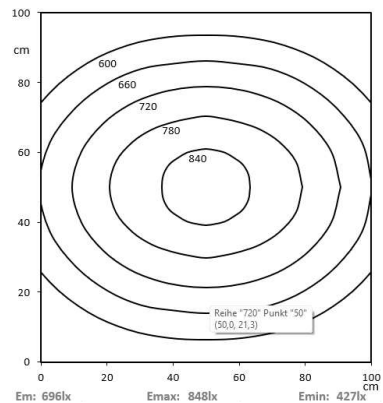

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diffus
Befestigung / Fastening	Starr
Gewicht(Netto) / Weight(Net)	1,02 kg
Betriebstemperatur / Operating Temp.	-20°C / +45°C
Lebensdauer / Lifetime	min. 60000 h
Zubehör / Equipment	-

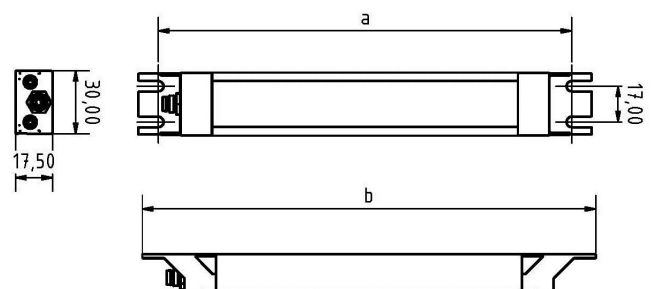

a= 1463mm b= 1475mm

*Technische Änderungen vorbehalten | technical modifications reserved