


# BI2U-EGT08-AP6X-V1131 Inductive Sensor - With Extended Switching Distance

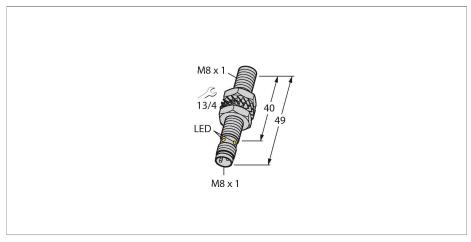


#### Technical data


| Type                                      | BI2U-EGT08-AP6X-V1131         |
|---|-------------------------------|
| ID  | 4602070                       |
| General data                              |                               |
| Rated switching distance                  | 2 mm                          |
| Mounting conditions                       | Flush                         |
| Secured operating distance                | ≤ (0.81 × Sn) mm              |
| Repeat accuracy                           | ≤ 2 % of full scale           |
| Temperature drift                         | ≤ ±10 %                       |
|   | ≤ ± 20 %, ≤ -25 °C v ≥ +70 °C |
| Hysteresis                                | 315 %                         |
| Electrical data                           |                               |
| Operating voltage                         | 1030 VDC                      |
| Residual ripple                           | ≤ 10 % U <sub>ss</sub>        |
| DC rated operational current              | ≤ 150 mA                      |
| No-load current                           | 15 mA                         |
| Residual current                          | ≤ 0.1 mA                      |
| Isolation test voltage                    | ≤ 0.5 kV                      |
| Short-circuit protection                  | yes / Cyclic                  |
| Voltage drop at I <sub>e</sub>            | ≤ 1.8 V                       |
| Wire breakage/Reverse polarity protection | yes / Complete                |
| Output function                           | 3-wire, NO contact, PNP       |
| DC field stability                        | 200 mT                        |
| AC field stability                        | 200 mT <sub>ss</sub>          |
| Insulation class                          |                               |
|   |                               |

#### **Features**

- ■Threaded barrel, M8 x 1
- Stainless steel, PTFE-coated
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Large switching distance
- High switching frequency
- Recessed mountable
- ■DC 3-wire, 10...30 VDC
- ■NO contact, PNP output
- ■M8 x 1 male connector

#### Wiring diagram





#### Functional principle


Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.




### Technical data

| Mechanical data                       |   |
|---------------------------------------|---|
| Design                                | Threaded barrel, M8 x 1                   |
| Dimensions                            | 49 mm                                     |
| Housing material                      | Stainless steel, 1.4427 SO, PTFE-coated   |
| Active area material                  | Plastic, PP, PTFE-coated                  |
| Max. tightening torque of housing nut | 5 Nm                                      |
| Electrical connection                 | Connector, M8 × 1                         |
| Environmental conditions              |   |
| Ambient temperature                   | -30+85 °C                                 |
| Vibration resistance                  | 55 Hz (1 mm)                              |
| Shock resistance                      | 30 g (11 ms)                              |
| Protection class                      | IP68                                      |
| MTTF                                  | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                       | LED, Yellow                               |


## Mounting instructions



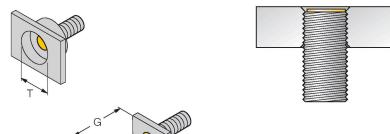

| Distance D             | 16 mm  |
|------------------------|--------|
| Distance W             | 6 mm   |
| Distance T             | 24 mm  |
| Distance S             | 12 mm  |
| Distance G             | 12 mm  |
| Diameter active area B | Ø 8 mm |
|                        |        |

All flush mountable uprox+ threaded barrel types are also recessed mountable. Safe operation is ensured if the sensor is screwed in by half a turn.



#### Accessories

QM-08

6945100

Quick-mount bracket with deadstop, chrome-plated brass, male thread M12 x 1. Note: The switching distance of proximity switches may be reduced through the use of quickmount brackets. BST-08B

6947210

Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6




BSS-08 6901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



69479

Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum



#### Accessories

Dimension drawing

Type PKGV3M-2/TXL ID

6627803

Connection cable, M8 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: PUR, black; cULus approval

