


# Q256EQ Photoelectric Sensor – Opposed Mode Sensor (Emitter)






Туре	Q256EQ	
ID no.	3031935	
Optical data		
Function	Opposed mode sensor	
Operating mode	Emitter	
Light type	IR	
Wavelength	950 nm	
Range	020000 mm	
Electrical data		
Operating voltage	1030 VDC	
Residual ripple	< 10 % U <sub>ss</sub>	
Readiness delay	≤ 100 ms	
Response time typical	< 3 ms	
Mechanical data		
Design	Rectangular, Q25	
Design	3 , ,	
Dimensions	Ø 18 x 30 x 25 x 62.7 mm	
Dimensions	Ø 18 x 30 x 25 x 62.7 mm	
Dimensions Housing material	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material	
Dimensions Housing material Lens	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material plastic, Polycarbonate	
Dimensions Housing material Lens Electrical connection	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material plastic, Polycarbonate  Cable, M12 × 1, PVC	
Dimensions Housing material Lens Electrical connection Number of cores	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material plastic, Polycarbonate  Cable, M12 × 1, PVC	
Dimensions Housing material Lens Electrical connection Number of cores Ambient temperature	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material plastic, Polycarbonate  Cable, M12 × 1, PVC  2  -40+70 °C	
Dimensions  Housing material  Lens  Electrical connection  Number of cores  Ambient temperature  Protection class	Ø 18 x 30 x 25 x 62.7 mm  Plastic, Thermoplastic material  plastic, Polycarbonate  Cable, M12 × 1, PVC  2  -40+70 °C  IP69  Chemical-resistant Encapsulated	

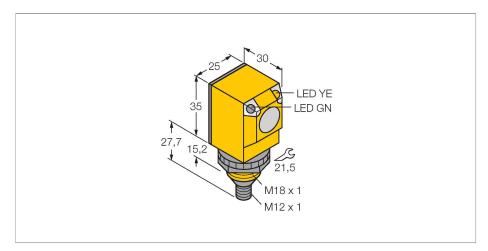

#### **Features**

- ■M12 × 1 male connector, 4-pin ■Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- ■Operating voltage: 10...30 VDC

### Wiring diagram



# Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. The excellent light/dark contrast and the high excess gain allow operation over larger distances and under difficult conditions.

Excess gain curve Excess gain in relation to the distance




# Technical data

## Tests/approvals

Approvals

CE, UL, CSA



#### Accessories


# SMB18A 3033200 Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

nting bracket, rectangular, ess steel, for sensors with 18 hread

SMB18AFAM10

Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

3012558



3052519 Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

#### Accessories

Dimension drawing	Type	ID no.	
M12x1 e 15 2 14  11.5 +	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
0 15 M12x 1 26.5 32 — 32 — 55	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com