


excom I/O System


System Enclosure 650 x 550 x 260

EG-VA655526/112-0200/2GD70

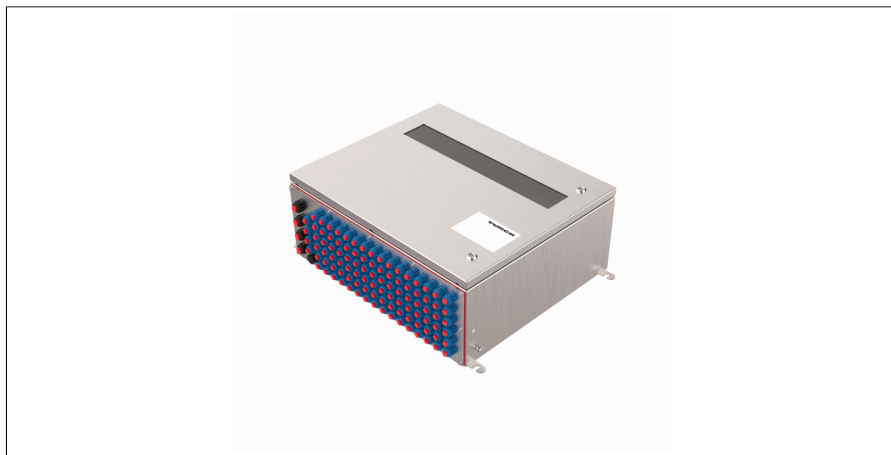



- Stainless steel quality 1.4404 (AISI 316L)
- With inspection window
- Receptacle plate equipped with plastic cable glands (4 × M25 power supply, 4 × M20 Ex i bus, 96 × M20 Ex i I/O signals) and 1 × M20 breather/drain
- Additional installation of Ex e terminals (2 × UT10, 2 × UT10-BU, 2 × UT10-PE) for connecting the supply voltage
- Stainless steel housing with built-in module rack MT16-2G

Dimensions



Type	EG-VA655526/112-0200/2GD70
ID	100003105
Operating voltage	19.2...32 VDC
Ex approval acc. to conformity certificate	IECEx PTB 16.0020
Ex approval acc. to conformity certificate	PTB 16 ATEX 2006
Device designation	Ex II 2 (1) G Ex e q mb ib [ia Ga] IIC T4 Gb
Device marking	Ex II 2 (1) D Ex tb [ia Da] IIIC T135°C Db
Built-ins	
Module racks	1 x MT16-2G
Ex-e terminals	2 x UT 10, 2 x UT 10 BU, 2 x UT 10-PE; Phoenix Contact
Terminal cross-section	0.5...10 mm² (AWG: 20...8)
Receptacle plate	
Supply	4 × M25 (Ø 10...17 mm), plastic, black
Fieldbus	4 x M20 (Ø 7...13 mm), plastic, blue
Field signals	96 x M20 (Ø 7...13 mm), plastic, blue
Breather/Drainer	1 x M20, plastic
Housing material	Stainless steel, 1.4404 (AISI 316L)
Wall thickness	1.5 mm
Housing surface	Grinded and polished (240 grain size distribution)
Housing color	Stainless steel, unvarnished
Sealing material	silicone
Inspection window	yes
Connection mode	Wall mounting
Earthing bolt	M8 x 1.5
Protection class	IP66
Relative humidity	≤ 93 % at 40 °C acc. to IEC 60068-2-78 Test Cab
Vibration test	Acc. to IEC 60068-2-6
Shock test	Acc. to IEC 60068-2-27
Dimensions	650 x 550 x 260 mm
Approvals	ATEX

Accessories

Type code	Ident no.		Dimension drawing
BM-PS	6884044	Cover for the unused power port	 Technical drawing of the BM-PS cover. It is a rectangular plate with dimensions: width 45, height 145, and total height 155. It has 4x M4 mounting holes. The bottom edge has a 16mm wide section and a 25mm wide section.
VSTS22	6884043	Socket spanner for cable glands, SW22	 Image of the VSTS22 socket spanner, a metal tool with a curved handle and a rectangular head.
VSTS24	6900462	Socket spanner for cable glands, SW24	 Image of the VSTS24 socket spanner, a metal tool with a curved handle and a rectangular head.
VSTS27	6884073	Socket spanner for cable glands, SW27	 Image of the VSTS27 socket spanner, a metal tool with a curved handle and a rectangular head.
ELST-M20EX	6884033	Pressure compensation element (plastic), prevents condensation inside the housing	 Technical drawing of the ELST-M20EX pressure compensation element. It is a cylindrical plastic part with dimensions: outer diameter 28.5, inner diameter 27, and length 34. It has an M20 thread on one end.

Accessories

Type code	Ident no.		Dimension drawing
SK8	6900360	Shield terminal for shielding bus bars, PU 10 pieces	