

S30RW3LP W/30

Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter

Technical data


Type	S30RW3LP W/30
ID no.	3033951
Optical data	
Function	Retroreflective sensor with polarizing filter
Reflector included in delivery	no
Light type	Red polarized
Wavelength	680 nm
Range	50...6000 mm
Electrical data	
Operating voltage	20...250 VAC
AC rated operational current	≤ 200 mA
Output function	Dark operation, Relay output
Switching frequency	≤ 40 Hz
Readiness delay	≤ 100 ms
Response time typical	< 16 ms
Mechanical data	
Design	Threaded barrel, S30
Dimensions	Ø 30 mm
Housing material	Plastic, PBT
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Number of cores	3
Ambient temperature	-40...+70 °C
Protection class	IP67
Special features	Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Excess gain indication	LED
Tests/approvals	
Approvals	CE, UL, CSA



Features

- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C


Wiring diagram



Functional principle

Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors have a high function gain and good contrast performance. Further it is merely required to install and wire a single device.


Excess gain curve
Excess gain in relation to the distance

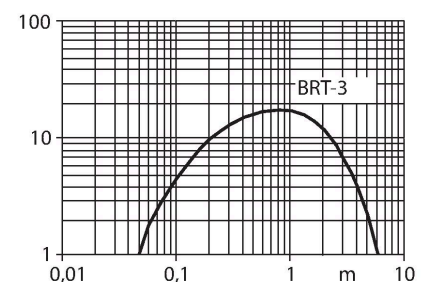

Accessories

SMB30A


3032723



Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread

SMB30FAM10


3011185



Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm

SMB30SC


3052521



Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

SMBAMS30P

3073135



Mounting bracket, stainless steel, for sensors with 30 mm thread

Accessories

Dimension drawing	Type	ID no.	
	BRT-3	3016164	Round reflector, reflection coefficient 1.0, material acrylic, ambient temperature -20...+60 °C