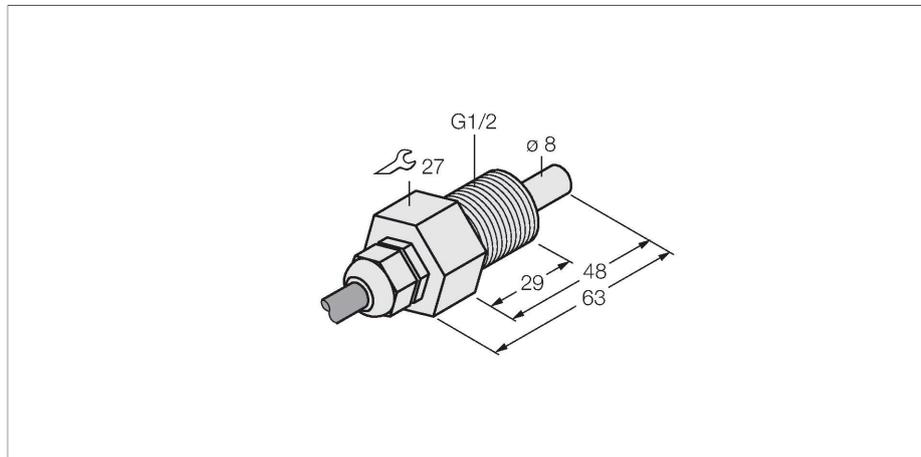


# FCS-GL1/2T-NA

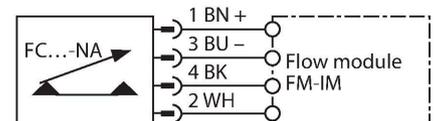
## Flow Monitoring – Immersion Sensor without Integrated Processor



### Features

- Sensor for liquid media
- Calorimetric functionality
- Adjustment via signal processor
- Status indicated via LED chain on signal processor
- Sensor made of PTFE
- Cable device
- 4-wire connection to the processor

### Wiring diagram



### Functional principle

Our insertion - flow sensors operate on the principle of thermodynamics. The measuring probe is heated by several °C as against the flow medium. When fluid moves along the probe, the heat generated in the probe is dissipated. The resulting temperature is measured and compared to the medium temperature. The flow status of every medium can be derived from the evaluated temperature difference. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media.

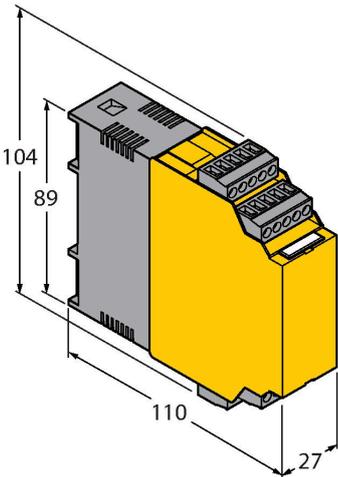
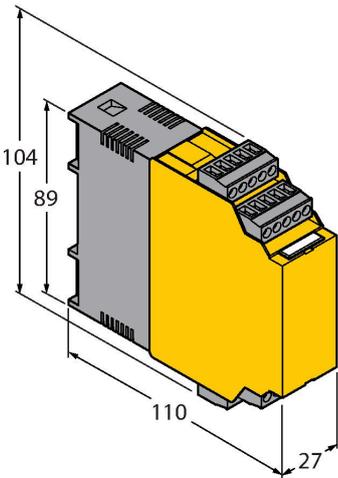
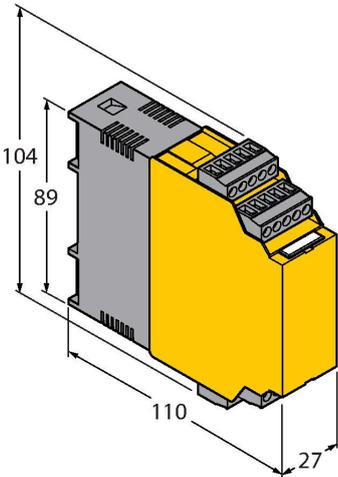
### Technical data

ID	6870422
Type	FCS-GL1/2T-NA
Mounting conditions	Immersion sensor
Water Operating Range	1...70 cm/s
Oil Operating Range	2...100 cm/s
Stand-by time	typ. 60 s (40...100 s)
Switch-on time	typ. 30 s (10...50 s)
Switch-off time	typ. 30 s (10...50 s)
Temperature jump, response time	typ. 100 s (50...100 s)
Temperature gradient	≤ 1 K/min
Medium temperature	-10...+70 °C
<b>Electrical data</b>	
Protection class	IP68
<b>Mechanical data</b>	
Design	Immersion
Housing material	Plastic, PTFE
Sensor material	Plastic, PTFE
Max. tightening torque of housing nut	5 Nm
Electrical connection	Cable
Cable length	2 m
Cable Jacket Material	FEP
Core cross-section	4 x 0.25 mm <sup>2</sup>
Pressure resistance	5 bar
Process connection	G 1/2" long version

Technical data

Tests/approvals

Accessories

Dimension drawing	Type	ID	
 <p>Technical drawing showing the dimensions of the FM-IM-3UP63X signal processor. The drawing is a perspective view of a yellow and grey rectangular component. Dimensions are indicated with dimension lines: a total height of 104, a height to the top of the terminal block of 89, a total width of 110, and a depth of 27. The terminal block has three rows of terminals.</p>	FM-IM-3UP63X	7525100	Signal processor for non-Ex flow sensors from the FC....-NA... family; operating voltage 20...30 VDC; LED bar for displaying flow speed and medium temperature; IO-Link device with transistor outputs for flow, temperature and errors
 <p>Technical drawing showing the dimensions of the FM-IM-3UR38X signal processor. The drawing is a perspective view of a yellow and grey rectangular component. Dimensions are indicated with dimension lines: a total height of 104, a height to the top of the terminal block of 89, a total width of 110, and a depth of 27. The terminal block has three rows of terminals.</p>	FM-IM-3UR38X	7525102	Signal processor for non-Ex flow sensors from the FC....-NA... family; operating voltage 20...250 VAC; LED bar for displaying flow speed and medium temperature; IO-Link device with transistor outputs for flow, temperature and errors
 <p>Technical drawing showing the dimensions of the FM-IM-2UPLI63X signal processor. The drawing is a perspective view of a yellow and grey rectangular component. Dimensions are indicated with dimension lines: a total height of 104, a height to the top of the terminal block of 89, a total width of 110, and a depth of 27. The terminal block has two rows of terminals.</p>	FM-IM-2UPLI63X	7525104	Signal processor for non-Ex flow sensors from the FC....-NA... family; operating voltage 20...30 VDC; LED bar for displaying flow speed and medium temperature; IO-Link device with analog output for flow and transistor outputs for temperature and errors