


# REM-101SA0C-9D38B-H1151

## Absolute Rotary Encoder - Multiturn Industrial Line

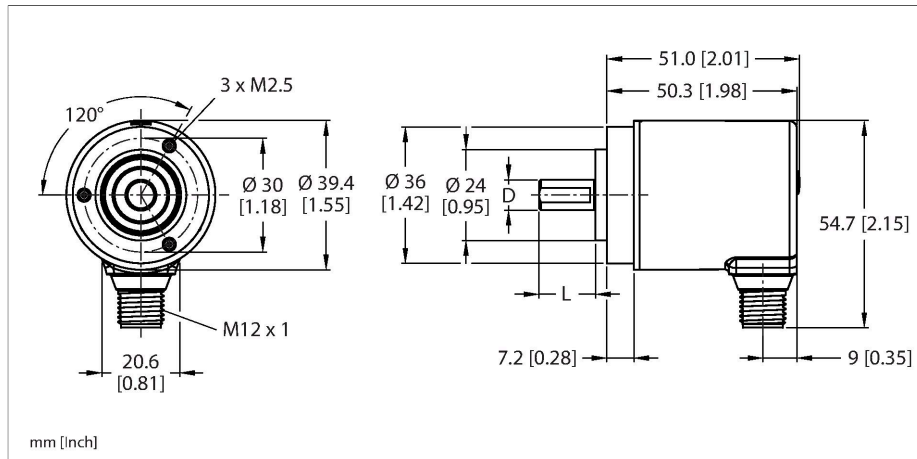



### Technical data

Type	REM-101SA0C-9D38B-H1151
ID	100011362
Measuring principle	Magnetic
<b>General data</b>	
Max. Rotational Speed	4000 rpm
Moment of inertia of the rotor	$1.8 \times 10^{-5}$ kgm <sup>2</sup>
Starting torque	< 0.01 Nm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
<b>Electrical data</b>	
Operating voltage	10...30 VDC
No-load current	30 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Communication protocol	CANopen
Interface	CAN High-Speed in accordance with ISO 11898, basic and full CAN, CAN specification 2.0 B
Node ID	1...127 mit Software konfigurierbar; Werkseinstellung: 63
Baud rate	10...1000 kbps configurable with software
<b>Mechanical data</b>	
Design	Solid shaft
Flange type	Clamping flange
Flange diameter	Ø 36 mm

### Features

- Clamping flange, Ø 36 mm
- Solid shaft, Ø 6.35mm × 12.5mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 10...30 VDC
- CANopen
- M12 × 1 male connector, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 16 bit over total resolution
- Total resolution 32 bit scalable, default: 32 bit


### Wiring diagram



## Technical data

Shaft Type	Solid shaft
Shaft diameter D [mm]	6.35
Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	5-pin
Axial shaft load	20 N
Radial shaft load	40 N
<b>Environmental conditions</b>	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s <sup>2</sup> , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s <sup>2</sup> , 6 ms
Protection class	IP67
Protection class shaft	IP67

## Accessories

Dimension drawing	Type	ID	
	FSM-2FKM57	6622101	CANopen/DeviceNet/power supply T-splitter, 1 × M12 male connector, 2 × M12 female connector, 5-pin
	RKC5701-5M	6931034	Bus cable for CAN (DeviceNet, -CANopen), M12 female connector, straight, cable length: 5 m, jacket material: PUR, anthracite; cULus approval

