


T30SN6FF150



Photoelectric Sensor – Diffuse Mode Sensor with Fixed-Field Background Suppression

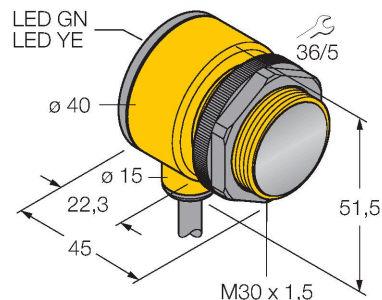

Features

- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Operating voltage: 10...30 VDC
- NPN switching output, changeover

Wiring diagram

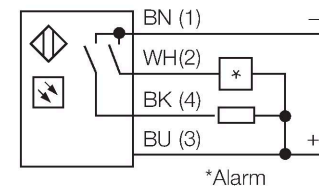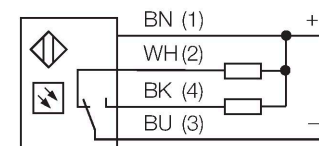

Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

Technical data

Type	T30SN6FF150
ID no.	3056594
Optical data	
Function	Diffuse mode sensor with fixed-field background suppression
Light type	IR
Wavelength	880 nm
Range	1...150 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Connection programmable, NPN
Switching frequency	≤ 160 Hz
Overcurrent release	> 220 mA
Mechanical data	
Design	Rectangular with thread, T30
Dimensions	45 x 40 x 51.5 mm
Housing material	Plastic, PBT
Lens	plastic, Acrylic
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Core cross-section	0.5 mm ²
Ambient temperature	-40...+70 °C
Protection class	IP67

Technical data


Special features	Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Alarm display	LED yellow Flashing
Tests/approvals	
MTTF	448 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, UL, CSA

Accessories

SMB1815SF

3053279


Mounting bracket, PBT black, for PICO-GUARD points



SMB30A

3032723


Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30FAM10

3011185

Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm



SMBAMS30P

3073135

Mounting bracket, stainless steel, for sensors with 30 mm thread

