


FTCI-G1/4D06A4P-2LIX-H1141

Flow Rate Measurement – Inline Sensor with Integrated Processor

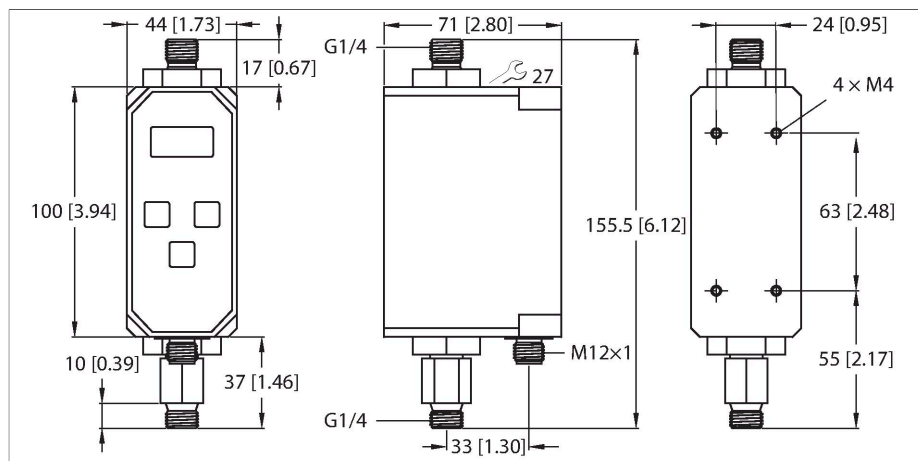


Technical data

ID	100004083
Type	FTCI-G1/4D06A4P-2LIX-H1141
Mounting conditions	Inline sensor
Application area	Flow rate/temperature monitoring of water
Flow operating range	0.01...2 l/min
Stand-by time	6...10 s
Temperature gradient	≤ 400 K/min
Medium temperature	0...+60 °C
Ambient temperature	0...+60 °C
Electrical data	
Operating voltage	21.6...26.4 VDC
Current consumption	≤ 100 mA
Output function	Analog output
Short-circuit protection	yes
Reverse polarity protection	yes
Current output	4...20 mA
Load	200...500 Ω
Protection class	IP65
MTTF	217 years acc. to SN 29500 (Ed. 99) 40 °C
Mechanical data	
Design	Inline
Housing material	Plastic, PBT
Sensor material	Stainless steel, 1.4571 (AISI 316Ti)
Electrical connection	Connector, M12 x 1

Features

- Compact inline flow sensor
- Calorimetric principle
- Monitoring of flow rate
- Monitoring of the medium temperature
- Parameterization via pushbutton
- Protected by software code
- Output flow 4...20 mA, linear
- Output temperature 4...20 mA, linear
- DC 4-wire, 21.6...26.4 VDC
- 4...20 mA analog output
- Plug-in device, M12 x 1

Wiring diagram

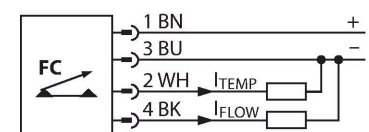

Functional principle

The FTCIs from TURCK monitor flow rates of liquids passing through the sensor reliably and wear-free. These sensors are designed for high-precision flow rate measurement rather than simple flow monitoring tasks.

Based on the thermodynamic principle, electrical energy is converted in heat energy. The heat generated in the probe is conducted away by the flowing medium. The dissipated heat quantity is used as a direct measure for the medium's flow speed. The integrated microprocessor evaluates the data and calculates the flow rate. Based on the applied principle, the user is also indicated the media temperature.

Technical data

Pressure resistance	20 bar
Process connection	G 1/4"
Flow state display	7-segment display, switching status LED (yellow)
Indication: Setpoint reached	Yellow
Programming options	Flow rate correction, mean value, access code
Tests/approvals	

In addition to the standardized electrical output signals for industrial applications, the TURCK flow meters also indicated the current flow rate on its 3-digit 7-segment display.

Accessories

FTCI-MP01AL	6870040
-------------	---------

Mounting plate for FTCl flow meter for front mounting

